


# APPLICATIONS

# REVISIONS

NEXT ASSY	USED ON	LTR	DESCRIPTIONS	DATE	APPROVED
	MULTIPLE	—	BASELINE RELEASE	05 / 25 / 94	

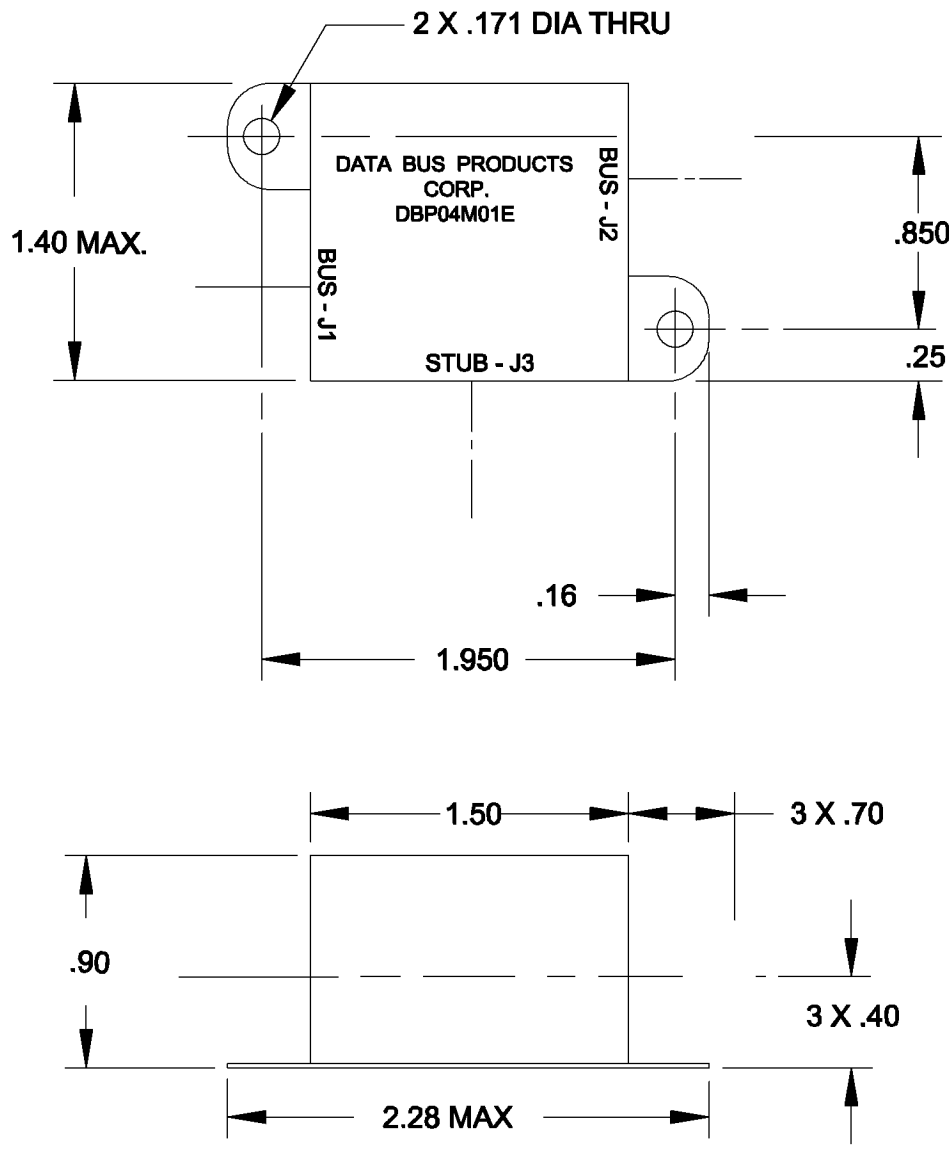


INTERFACE CONTROL DRAWING

REV	LTR	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES 2PL ± .03 3PL ± .010		CONTRACT NO.												<p align="center"><b>DATA BUS PRODUCTS CORP.</b> MANHASSET, NEW YORK 11030</p> <p align="center"><b>COUPLER, DATA BUS, SINGLE STUB MIL - STD - 1553B THREADED CONNECTORS</b></p>																	
MATERIAL		PREPARED																													
SEE PARAGRAPH 2.1		W.S.																													
		CHECKED																													
		940525																													
		ENGR.												SIZE	CODE IDENT NO.	DRAWING NO.															
		ENGR.												A	03JJ7	DBP04M01E															
		APPROVED												SCALE : NONE																	
		APPROVED BY OTHER ACTIVITY												REV. —																	
														SHEET 1 OF 2																	

# REVISIONS

LTR	DESCRIPTIONS	DATE	APPROVED
—	BASELINE RELEASE	05 / 25 / 94	

- 1.0 ELECTRICAL SPECIFICATIONS: IAW MIL - STD - 1553B.
- 1.1 COMMON MODE REJECTION: -55.0dB MAX @ 1.0MHz.
- 1.2 DROOP: 20% MAX (250kHz).
- 1.3 OVERSHOOT & RINGING: ± 1.0V PEAK (250kHz) SQUARE WAVE WITH 100ns MAX RISE & FALL TIME).
- 1.4 STUB VOLTAGE: 1.0V TO 14.0V P-P; LINE TO LINE; SIGNAL VOLTAGE, TRANSFORMER COUPLING.
- 1.5 INPUT IMPEDANCE OF BUS: 3000 OHMS MIN. (75kHz - 1.0MHz), STUB WITH OPEN CIRCUIT.
- 1.6 FAULT PROTECTION: 58.5 OHMS ± 2% RESISTOR IN SERIES WITH TRANSFORMER WINDING ON BUS SIDE.
- 1.7 RESISTOR VALUE: 1 WATT IAW MIL - R - 39017, R1 - R2 (75% Zo).  
NOMINAL LINE IMPEDANCE OF BUS (Zo): 78 OHMS.
- 2.0 MECHANICAL SPECIFICATIONS:
- 2.1 MATERIAL: ENCLOSURE: COLD ROLLED STEEL, .031 THK..
- 2.1.1 MOUNTING PLATE: COLD ROLLED STEEL, .042 THK..
- 2.2 FINISH: BLACK ENAMEL PER TT - E - 529, COLOR IAW FED - STD - 595, #27028, OVER HOT TIN DIP.
- 2.3 CONNECTORS: BJ3157/3150 THREADED (TROMPETER OR EQUIV.) J1 THRU J3  
MATING CONNECTOR FOR REFERENCE: PL3155 (TROMPETER OR EQUIV.).
- 3.0 ENVIRONMENTAL:
- 3.1 OPERATING TEMPERATURE RANGE: -55°C TO 125°C.

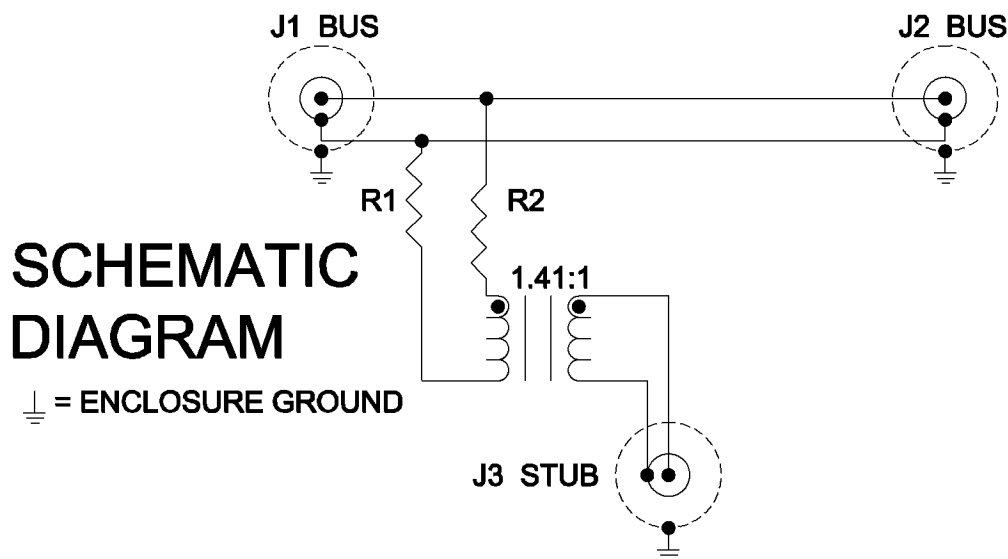

SIZE	CODE IDENT NO.	DRAWING NO.
A	03JJ7	DBP04M01E
SCALE : NONE	REV. —	SHEET 2 OF 2